

## 50/75/100 SERIES



- Allows a temperature instrument to be removed and replaced without shutting down and draining the process
- Reduces the possibility of damage to the temperature instrument
- Provides protection to the operator
- 1/2" NPSM instrument connection, 3/4" NPT process connection standard - 1/2" NPT, 1" NPT, flanged and sanitary options available
- 150 Class and 300 Class raised face flanged thermowells available
- The Female thread will accept the 1/2" NPT Male thread without galling or seizing
- Brass, 304 Stainless Steel, or 316 Stainless Steel standard material options - other options available
- Standard style is stepped; available in straight and tapered
- Different lagging lengths are available

### APPLICATIONS

- Recommended wherever the process being measured is under pressure, corrosive, abrasive, or moving at a high velocity
- HVAC
- Petrochemical
- Oil and gas
- Process (flanged thermowells)

### SPECIFICATIONS

<b>Bore size</b>	0.260" (6.35 mm)
<b>Process connection</b>	1/2" NPT, 3/4" NPT, 1" NPT
<b>Instrument connection</b>	1/2" NPSM
<b>Materials</b>	316 Stainless Steel, 304 Stainless Steel, Brass
<b>Pressure rating</b>	316 and 316 Stainless Steel: 7,000 psi @ 70 °F Brass: 5,000 psi @ 70 °F
<b>Style</b>	≤4": Straight shank >4": Stepped shank
<b>Maximum shank diameter</b>	0.750" (19.05 mm)



**WARNING:** This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)


ORDERING INFORMATION						
PROCESS CONNECTIONS	50	1/2" NPT only	100	1" NPT or Flange Connection *	200	2" Flange Connection *
	75	3/4" NPT only	150	1-1/2" Flange Connection *		
STEM LENGTHS	025	2-1/2" **	120	12"	25mm	25 mm
	040	4" **	150	15"	50mm	50 mm
	060	6"	180	18"	100mm	100 mm
	090	9"	240	24"	150mm	150 mm
MATERIALS	Brass	Brass	304SS	304 Stainless Steel	316SS	316 Stainless Steel
	Other materials available on request					
OPTIONS	1/4	1/4" NPT Instrument Connection	PC	Plug and Chain	RF2	Raised Face 300 Class Flange
	3/8B	3/8" Diameter Bore	RF1	Raised Face 150 Class Flange	RTD	For use with 900/910 Series RTDs

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


\* To order a Flange Connection, you must specify Option RF1 or RF2. Flange Connections available only in Stainless Steel.

\*\* Flange Connection not available.

**EXAMPLE**

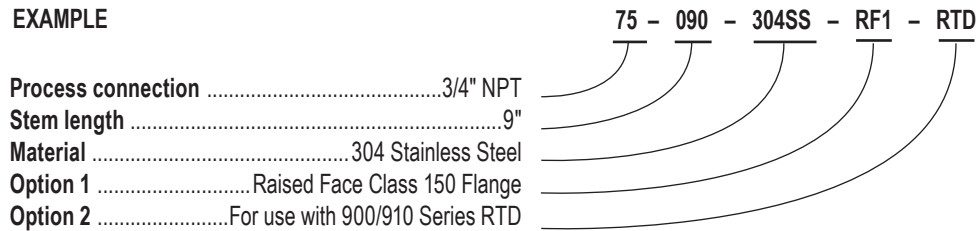


## Straight Shank

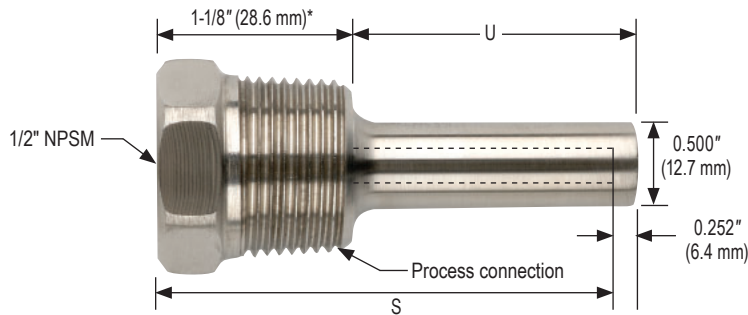

\*1-3/4" (44.5 mm) for 040 Ordering Code

## Stepped Shank

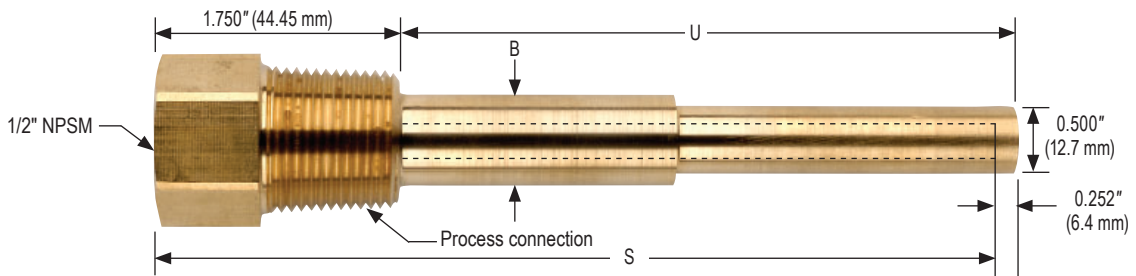

Bore Size	"B" Maximum Insertion Diameter
0.260" (6.35 mm)	3/4" (19.05 mm)

		Straight				Stepped				
Insertion "U"	mm	41.3	63.5	114.3	190.5	266.7	342.9	419.1	571.5	
	inch	1-5/8	2-1/2	4-1/2	7-1/2	10-1/2	13-1/2	16-1/2	22-1/2	
Bore Depth "S"	mm	63.5	101.6	152.4	228.6	304.8	381.0	457.2	609.6	
	inch	2-1/2	4	6	9	12	15	18	24	
Ordering Code		025	040	060	090	120	150	180	240	

Flange Connection Thermowell dimensions on next page.